

ENOITALIA

PRICE LIST 2024





FRUIT LINE



DESTONER PULPER DELTA



Video



DELTA 1



Cod. 804

DELTA 2



DELTA ZERO

STANDARD FEATURES

- Engine and emergency stop
- Structure in AISI 304 stainless steel
- Stainless steel shaft with adjustable rubber blades
- Electrical system with emergency stop
- Stainless steel loading screw
- Stainless steel mesh with 0.8-12mm holes
- Thermal protection for the engine
- Frequency inverter 7,5 Kw and automatic loading hopper (as standard on cod. 804)

MODEL		
Cod.	Description	€
802	Destoner DELTA ZERO	
801	Destoner DELTA 1 Three-phase	
803	Destoner DELTA 2 Three-phase	
804	Destoner DELTA 2 for tropical fruit application	

OPTIONAL		
Cod.	Description	€
4256	Automatic control panel for external pump in aspiration, three-phase, for Delta 1 e 2	
4260	Additional internal basket for DELTA 0 with hole size 0,8 - 12 mm	
4261	Additional internal basket for DELTA 1 with hole size 0,8 - 12 mm	
4262	Additional internal basket for DELTA 2 with hole size 0,8 - 12 mm	
4263	Single rubber plate for DELTA 0	
4264-1	Single rubber plate for DELTA 1	
4264-2	Single rubber plate for DELTA 2	
4265	Internal basket for DELTA ZERO with hole 0,6 mm	
4266	Internal basket for DELTA 1 with hole 0,6 mm	
4250	Electronic speed variator for Delta 1/2 (max 5,5 Kw)	
4251	Increased difference for 7,5 Kw engine for Delta 2	

MODEL	ENGINE HP (Kw)	POWER	STONE UNLOADING HEIGHT	JUICE UNLOADING HEIGHT	LOADING HEIGHT	CAPACITY	DIMENSION mm	WEIGHT
802	1,5 (1,1)	Single-phase / Three-phase	400 mm	300 mm	1300 mm	550 Kg/h	1500x800x1450	80 Kg
801	4 (3)	Three-phase	480 mm	370 mm	1420 mm	1200 Kg/h	1400x700x1420	150 Kg
803	5,5 (4)	Three-phase	480 mm	470 mm	1620 mm	2000 Kg/h	1800x850x1850	250 Kg
804	7,5 (5,5)	Three-phase	480 mm	470 mm	1620 mm	3000 Kg/h	1800x850x2200	300 Kg



POMEGRANADE AND PRICKLY PEAR SEMIAUTOMATIC LINE



Video

Cod. 4271+4278



Cod. 9925



Cod. 3210T



Cod. 4277



Cod. 801

STANDARD FEATURES (4271 - 3210T)

- Structure in stainless steel AISI 304
- Aluminum rollers
- 40 mm hose fittings for cod. 4271 and 50 mm for cod. 3210T
- Removable and interchangeable internal basket
- Accident prevention protections

MODEL		
Cod.	Description	€
4271	Crusher separate for whole fruit - stainless steel HP2 fixed rollers	
4278	Inox support for crusher with loading hopper	
3210T	Jolly 30 destemmer crusher for pomegranates with Euro 50 pump	
9928	Motorized storage tank with Euro40 pump and automatic operating probes	
801	Pulper for pomegranade arils - model DELTA 1	
4277	Centrifuge gravity filter with automatic draining pump	

OPTIONAL

Cod.	Description	€
9172	Electronical inverter for cod. 3210T	
9173	Electronical inverter for EURO pump	


MODEL	ENGINE Kw	POWER	CAPACITY	DIMENSION mm	WEIGHT
4271	1,5	220V-50Hz / 380V-50Hz	1200 Kg/h	1210x600x630	65 Kg
3210T	1,8	380V-50Hz	3000 Kg/h	1280x900x900	150 Kg



DESTEMMER FOR ELDER BERRY AND ELDER FLOWER



OUTLET

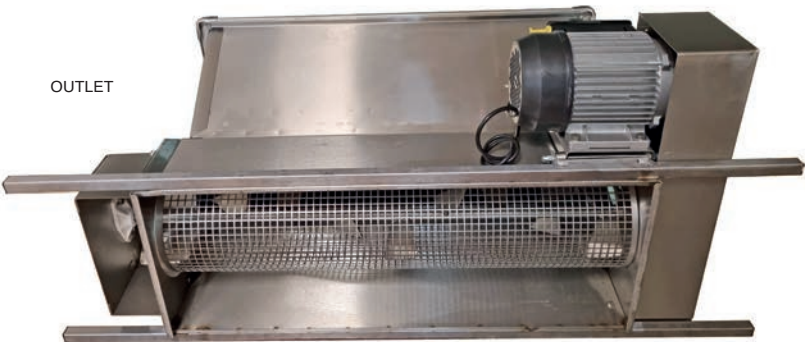

Cod. 4278



STANDARD FEATURES

- Structure in AISI 304 stainless steel
- Special stainless steel internal basket
- Stainless steel feeding screw
- HP1 engine

MODEL

Cod.	Description	€
4279	Elderberry separator	
4278	Inox support for crusher with loading hopper	

OPTIONAL

Cod.	Description	€
004/S	Electronic speed variator	
009	Stainless steel support for cod. 4279 open version (as an alternative to 4278)	

MODEL	ENGINE HP (Kw)	PRODUCTION	DIMENSION	WEIGHT
4279	HP1 (0,75)	800-1000 Kg/h	120x600x690 mm	53 Kg



BELT WASHING ELEVATOR FOR FRUIT




Video



Cod. 4286 + 4287



Cod. 4286 + 4289

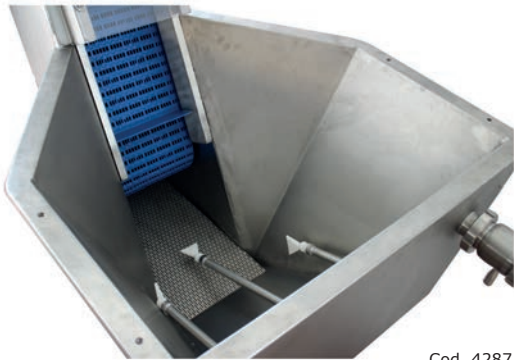

Cod. 4287



STANDARD FEATURES

- Structure in AISI 304 stainless steel
- Support trolley in stainless steel on 4 wheels
- Speed variator
- Removable internal basket
- Total drain with inox ball valve
- Control panel with emergency stop
- Fruit rinsing station
- Removable protection for quick cleaning
- Removable sorting table 1mt lenght

MODEL

Cod.	Description	€
4281	Belt elevator and washing with speed variator and sorting table	
4286	Belt elevator with washing tank and integrated mill, speed variator and sorting table	

OPTIONAL

Cod.	Description	€
4287	System for storage tank barboter	
4289	Extension for installation with Delta 2 (h.350 mm)	


MODEL	ENGINE HP (Kw)	POWER	UNLOADING HEIGHT	LOADING HEIGHT	CAPACITY	DIMENSION mm	DIMENSION HOPPER mm	WEIGHT
4281	1 (0,75)	Three-phase	1880 mm	910 mm	3000 Kg/h	2300/3000x900x2300h	870x840	230 Kg
4286	1 (0,75) + 4 (3)	Three-phase	1450 mm	910 mm	1000 Kg/h	2300/3000x900x2300h	870x840	260 Kg



MILL FOR FRUIT WITH ENGINE



Video



Cod. 4267 + 4269 + 4268

STANDARD FEATURES

- Structure in AISI 304 stainless steel
- Adjustable feet
- Emergency stop system on opening
- HP 2,5 single-phase 220V 50hz or three-phase 380V electric motor
- Emergency stop
- Interchangeable pressing sieve, holes available: 3,8,12mm (standard)

MODEL

Cod.	Description	€
991	MILL FOR FRUIT M-100	

OPTIONAL

Cod.	Description	€
4267	Special sieve with holes 3 or 8 mm	
4268	KIT replace blades	
4269	Mill scraper	
9175	Engine HP4	

MODEL	ENGINE HP (KW)	HOPPER DIMENSION	LOADING HEIGHT	UNLOADING HEIGHT	CAPACITY	DIMENSION mm	WEIGHT
M100	2,5 (1,8) MF/TF	610 mm	1400 mm	520 mm	1500-1800 Kg/h	1100x610x1400	45 Kg
					packing: 630x580x700		



FRUIT CRUSHER with Aluminium roller and Inox blades



ENO 1 - Hopper Inox, with engine 1 HP



MICROENO, MINIENO, ENO 1 - Hopper Inox with flywheel



MODEL K

MODEL KP

MODEL		
Cod.	Description	€
471 K	MICROENO - smalted hopper	
491 K	MINIENO - smalted hopper	
517 KP	MINIENO - hopper Inox	
504 KP	ENO 1 - with ENGINE hopper Inox safety protection	

OPTIONAL		
Cod.	Description	€
006	Safety protection (included on all motorized crusher)	

STANDARD FEATURES

- Self-adjusting aluminum rollers
- Flywheel (for models with flywheel)
- Motor with emergency stop (HP1 engine for code 504KP)
- Agitator with stainless steel blades

For grape crushers see p. 41

MODEL	ENGINE HP (Kw)	HOURLY PRODUCTION	HOPPER	DIMENSION mm		WEIGHT		ROLLER LENGHT
				with flywheel	with engine	with flywheel	with engine	
MICROENO	---	300 - 500 Kg/h	555x455 mm	860x365x470	---	14 Kg	---	150 mm
MINIENO	---	500 - 700 Kg/h	650x470 mm	1000x390x490	---	18 Kg	---	220 mm
ENO 1	1 (0,75)	500 - 700 Kg/h	850x560 mm	1210x580x350	1210x500x570	22 Kg	33 Kg	220 mm



CENTRIFUGAL FILTER WITH PUMP



STANDARD FEATURES

- Structure in AISI 304 stainless steel
- Support trolley in stainless steel on 4 wheels
- Conical 0.3 mm filter
- Single-phase power for filter
- Level probes
- Stainless steel centrifugal pump ENOS 20
- Control panel with emergency stop

MODEL

Cod.	Description	€
4277	Centrifuge gravity filter with automatic draining pump	

OPTIONAL

Cod.	Description	€
4291	Difference for Three-phase power supply only with cod. 9174	
9174	Difference for volumetric pump EURO 20	

MODEL	ENGINE (KW)	POWER	LOADING HEIGHT	CAPACITY	DIMENSION	WEIGHT
4277	0,52	Single-phase	410 mm	1000 Kg/h	800x1080x750 mm	



MOTORIZED BUFFER HOPPER with level controls



Cod. 9928



Version increased
Cod. 9929



Cod. 992

STANDARD FEATURES

- EURO 40 model pump with rotation inverter three-phase / single-phase
- Motorized buffer with 0.37kw engine, capacity 10 lt
- DIN 40 connection fitting
- Stainless steel trolley

MODEL

Cod.	Description	€
992	Motorized loading hopper with pump EURO 40	
9928	Automatic loading hopper with pump and level sensor	

OPTIONAL

Cod.	Description	€
9929	Difference for larger version, with tank capacity 60 lt	

MODEL	ENGINE HP (Kw)	HOPPER DIMENSION	CAPACITY PULP	DIMENSION	WEIGHT
992	hp 2,5 kw 1,87 MF/TF	240x320x370 mm	2000 Kg/h	960x900x620 mm	28 Kg
9928	hp 2,5 kw 1,87 TF	240x320x370 mm	2000 Kg/h	520x1200x930 mm	45 Kg



AUTOMATIC BUFFER TANK



STANDARD FEATURES

- Frame in stainless steel with conical floor
- Internal filter removable in stainless steel (hole 5x20)
- Panel control single phase with electronic level sensor
- Centrifuge pump ENOS in stainless steel
- Total drain valve
- 4 wheels with brakes
- Grid perforation on request from 0.6 to 6 mm

MODEL

Cod.	Description	€
4273	Automatic buffer tank with pump ENOS 20 in stainless steel single-phase	
4275	Automatic buffer tank with single-phase panel and plug for external pump (pump not included)	
4276	Automatic buffer tank with three-phase panel and plug for external pump (pump not included)	

OPTIONAL

Cod.	Description	€
5201	Euro pump 20 Single-phase	


MODEL	FITTING	HOPPER DIMENSION	HOPPER HEIGHT	CAPACITY	WEIGHT
4273	25 mm	600x700 mm	390 mm	130 lt	36 Kg



SEMI-AUTOMATIC FRUIT PROCESSING LINE



Video

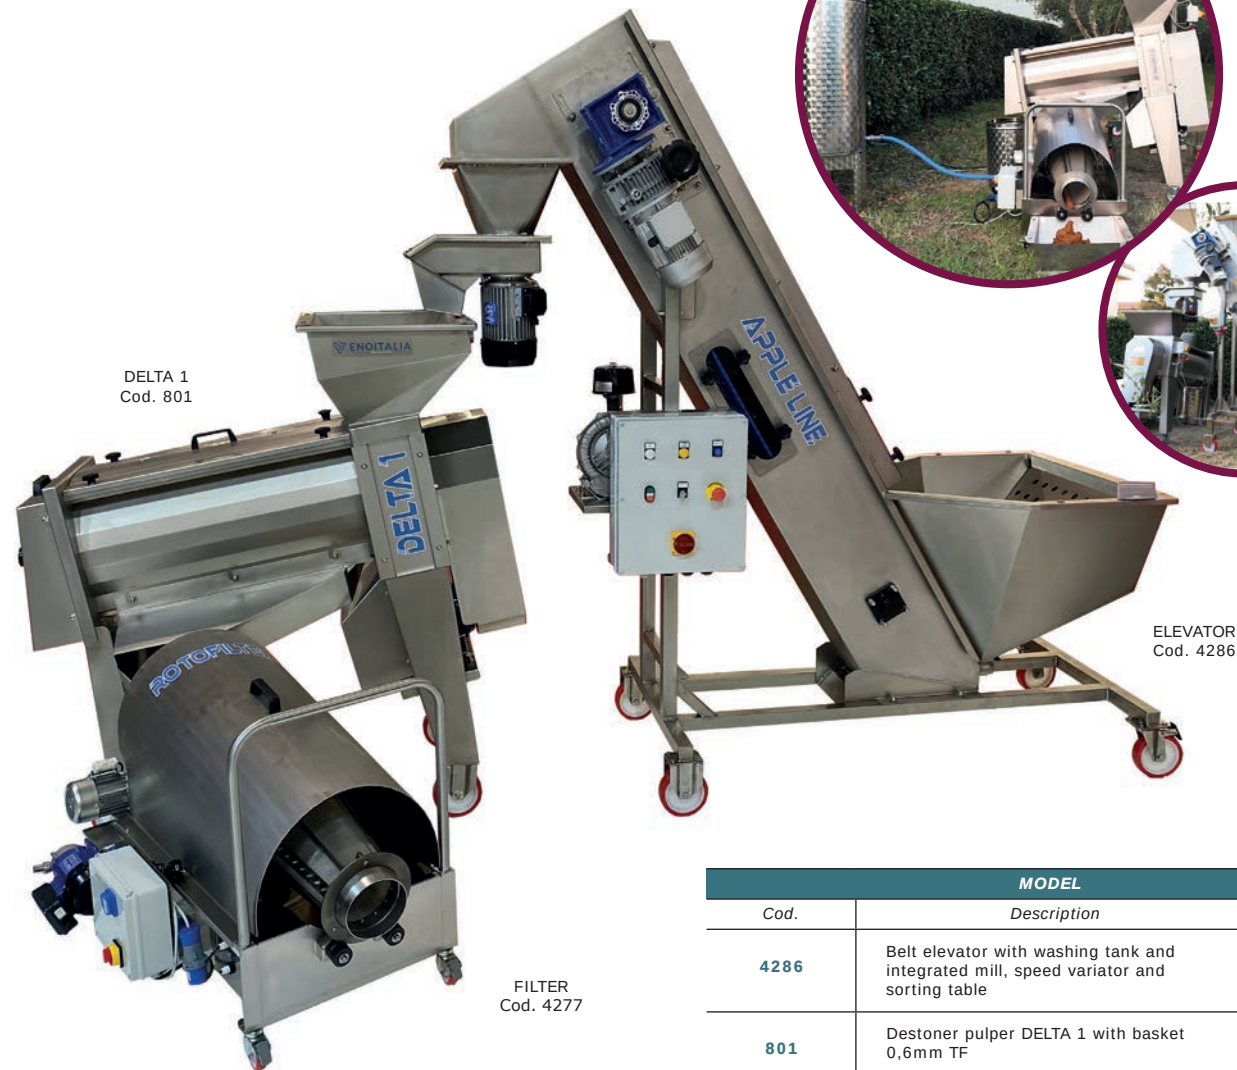

DELTA 1
Cod. 801

ELEVATOR
Cod. 4286

FILTER
Cod. 4277

STANDARD FEATURES

- Structure in AISI 304 stainless steel
- Stainless steel support trolley on 4 wheels
- Speed variator for cod. 4286
- Total drain valve in stainless steel
- Mill special type HP4, openable and removable mill
- Control panel with emergency stop
- Enos model liquid pump
- Productivity 35% juice, 55% pulp

MODEL

Cod.	Description	€
4286	Belt elevator with washing tank and integrated mill, speed variator and sorting table	
801	Destoner pulper DELTA 1 with basket 0,6mm TF	
4277	Automatic centrifuge filter with pump and buffer 0,3 mm	

OPTIONAL

Cod.	Description	€
4274	Centralized panel control to connect pulper, filter and elevator	

MODEL	ENGINE Kw	POWER	UNLOADING HEIGHT	LOADING HEIGHT	CAPACITY
4286-801-4277	9	Three-phase	1700 mm	600 mm	800-1000 Kg/h



BIN TIPPER



STANDARD FEATURES

- Structure in AISI 304 stainless steel
- Maximum case weight 300 - 1000 kg
- Hydraulic unit for gradual tilt control
- Outlet guillotine for product dosing

MODEL

Cod.	Description	€
4232	Bin Tipper 300 Kg	
4233	Bin Tipper 1000 Kg	

MODEL	DIMENSION CASE	ENGINE	MAX. CAPACITY	DIMENSION	WEIGHT
4232	1200x1000x1000 mm	2,2 Kw	300 Kg	1290x1650x1260 mm	220 Kg
4233	1200x1000x1000 mm	2,2 Kw	1000 Kg	1800x1650x1750 mm	300 Kg



BELT PRESS



STANDARD FEATURES

- Integrated filtration sieve
- High pressure washer
- integrated pump
- Buffer tank for liquid
- Double PVC belt
- Juice percentage 75%

MODEL

Cod.	Description	€
8010	Belt press 400	
8011	Belt press 700	
8012	Belt press 1000	

OPTIONAL

Cod.	Description	€
8110	Replacement belt 400	
8112	Replacement belt 700	
8113	Replacement belt 1000	


MODEL	CAPACITY Kg/h	ENGINE Kw	POWER	BELT WIDTH cm	DIMENSION	UNLOADING HEIGHT
8010	400	1,1	MF/TF 400 V+N	40	1450x1064x1340	600
8012	700	1,1	MF/TF 400 V+N	50	1995x1225x1350	570
8013	1000	1,1	MF/TF 400 V+N	60	1995x1325x1350	570



PASTEURIZERS



300 / 500 Lt

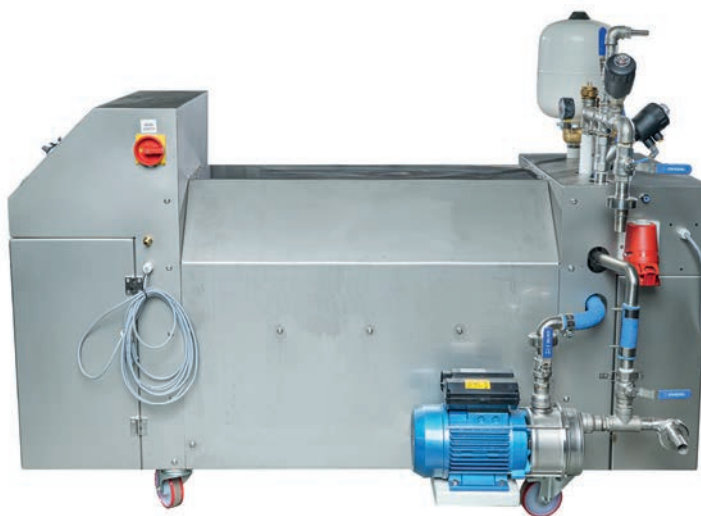

500 / 1000 Lt



STANDARD FEATURES


- EPDM impeller pump
- Oil burner (on request: natural gas burner for 500lt / 1000lt)
- Support platform in stainless steel
- Control panel for temperature setting

MODEL		
Cod.	Description	€
8021	Pasteurizer 500 lt/h	
8022	Pasteurizer 1000 lt/h	
8023	Pasteurizer 300 lt/h	
8024	Pasteurizer 500 lt/h	

MODEL	HOURLY PRODUCTION	DIESEL CONSUMPTION	BURNER CAPACITY	ELECTRICITY SUPPLY	ELECTRIC POWER	JUICE ENTRY	JUICE EXIT	DIMENSION mm
8021	500 lt/h 80°C	8 Kg/h	95 kw	230V/50 MF	1 kw	DIN 25	DIN 20	2050x750x1170
8022	1000 lt/h 80°C	10 Kg/h	95 kw	230V/50 MF	1 kw	DIN 25	DIN 25	2050x750x1170
8023	300 lt/h 80°C	-	-	TF	20 kw	DIN 25	DIN 25	925X913X1470
8024	500 lt/h 80°C	-	-	TF	30 kw	DIN 25	DIN 25	925X913X1470



BOTTLE PASTEURISER 200 LITRE

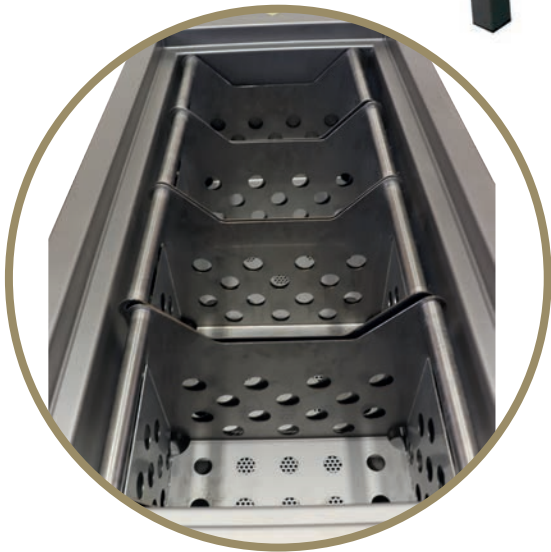

STANDARD FEATURES

- 200 litre capacity
- 3 removable baskets with covers
- Temperature control with external control unit
- Three-phase 380 V electrical panel
- Possibility of connection to an external hot water generator

MODEL

Cod.	Description	€
8030	Bottle pasteuriser 200 litre	

OPTIONAL

Cod.	Description	€
8032	Difference for temperature control with external pasteuriser	

MODEL	CAPACITY	ENGINE	POWER	DIMENSION	WEIGHT
8030	200 lt	12 Kw	TF 380V	480x1100x880 mm	120 Kg



ENOITALIA

ENOLOGICAL EQUIPMENTS

Via Provinciale Pisana 162 - 50050 CERRETO GUIDI (FI) - ITALY
tel. +39 0571 588031 - fax +39 0571 588080
www.enoitalia.net - info@enoitalia.net

